




Components

Top handle, Cable clamp, Pipe lock clamp (2ea), Lens Push-button (a), Top handle mounting bolt (Long 12.4mm), Camera mounting bolt (Short 9.5mm), L wrench (2ea)



1. Disassemble the cable clamp




2. Disassemble the Mounting bolt




3. Disassemble is completed
(bolts are used for assembling)



4. (C) Assemble the top Handle
Use a bolt (Long 12.4 mm)

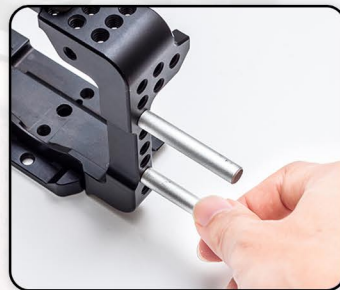

5. (D) Assemble cable clamp
Tighten the clamp lock pipe

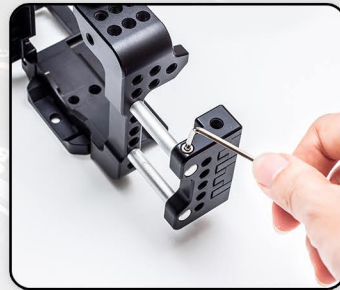


6. Secure the cable clamp with
the L wrench



7. Tighten the Lens push-button




8. Tighten the camera head on.
The left and right strap clip of the camera push up from the raised position to the right angle
(If you remove the mounting ring can be more comfortable)

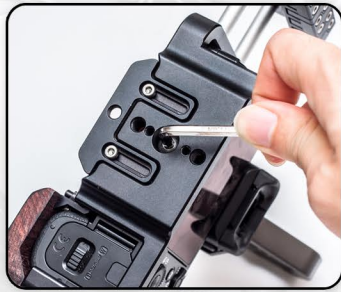

9. (C) Mount the camera with Short bolt (Short 9.5mm)



10. Tighten the Hand support

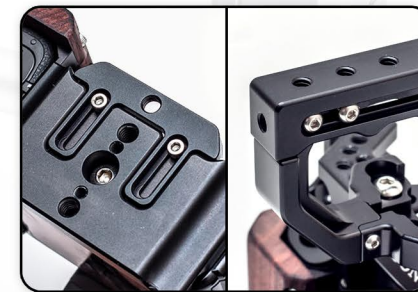

11. Using Body Supporter
Using Top handles balance